




- specially designed drill rig for drifting, crosscuts and roof holes in very narrow drifts and tunnels
- available with powerful HDT 1 hydraulic drifter or HDR rotary drill
- telescopic heavy duty BTL boom with double rotation unit for direct, fast and accurate positioning
- carrier with crawler drive for stable set up and easy manoeuvring in narrow tunnels and drifts
- modular design of all components for easy maintenance

Technical Data HDT 1	
Motor rating	75 kW
Pump capacity	2 x 110 l/min (+ 1 x 50 l/min optional)
Length approx. (depending on drill feed)	11,000 mm
Width	1,238 mm
Height (without protective roof)	1,560 mm
Weight approx.	12,000 kg
Gradeability (longitudinal)	± 20 degrees
Gradeability (transverse)	± 8 degrees
Drill booms	BTL 180 – 800 mm stroke
Drill feeds	various
Drifter	HDP15
Rotary drill	HDR
Drill control	<ul><li>collaring stage</li><li>automatic on/off of percussion</li></ul>
Additional equipment	<ul> <li>water pressure booster pump</li> <li>water mist flushing system</li> <li>protective roof</li> <li>cable reel</li> </ul>



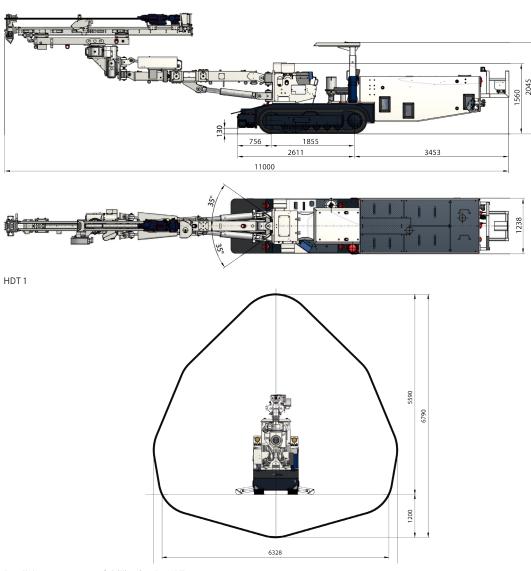

Parallel coverage area of drilling jumbo HDT 1



